

Geomechanical analysis of elastic parameters of the solid core of the Earth

Hatam H. Guliyev*

Department of Tectonophysics and Geomechanics, Institute of Geology and Geophysics of Azerbaijan National Academy of Sciences (ANAS), Ave. H. Javid 119, Baku AZ 1143, Azerbaijan

(Received October 17, 2016, Revised November 21, 2016, Accepted June 17, 2017)

Abstract. It follows from the basic principles of mechanics of deformable solids relating to the strength, stability and propagation of elastic waves that the Earth's inner core cannot exist in the form of a spherical structure in the assumed thermobaric conditions and calculation values of physico-mechanical parameters. Pressure level reaches a value that is significantly greater than the theoretical limit of medium strength in the model approximations at the surface of the sphere of the inner core. On the other hand, equilibrium state of the sphere is unstable on the geometric forming at much lower loads under the influence of the "dead" surface loads. In case of the action of "follower" loads, the assumed pressure value on the surface of the sphere is comparable with the value of the critical load of "internal" instability. In these cases, due to the instability of the equilibrium state, propagation of homogeneous deformations becomes uneven in the sphere. Moreover, the elastic waves with actual velocity cannot propagate in such conditions in solid medium. Violation of these fundamental conditions of mechanics required in determining the physical and mechanical properties of the medium should be taken into account in the integrated interpretations of seismic and laboratory (experimental) data. In this case, application of the linear theory of elasticity and elastic waves does not ensure the reliability of results on the structure and composition of the Earth's core despite compliance with the required integral conditions on the mass, moment of inertia and natural oscillations of the Earth.

Keywords: Earth's core; high pressure; instability; elastic waves with actual velocity

1. Introduction

Integrated interpretation of a variety of indirect geophysical and numerous laboratory and experimental data shows that the Earth's core consists of an outer liquid sphere and inner solid globe. Enough deep survey of researches on the structure and constitution of the Earth's core is made recently by Hirose *et al.* (2013), Ohtani *et al.* (2013), Badro *et al.* (2014), Litasov and Shatskiy (2016). They have truly noted that, despite some achievements in various directions, questions relating to the constitution and structure of the core and the lower mantle are far from unambiguous solutions. It is emphasized that further improvement of quantum chemical calculations by methods of molecular dynamics at high temperature would allow making progress in generation of consistent models of constitution and dynamics of the Earth's mantle and core.

Detailed information on the distribution of the physical parameters in the Earth's core is provided (Bullen 1978, Dziewonski and Anderson 1981, Anderson 1995, Kennett *et al.* 1995, Anderson 2007, Heiffrich and Kaneshima 2010, Nimmo 2015, Souriau and Calvet 2015, Litasov and Shatskiy 2016). Some results of this work are reflected in Fig. 1. Further detailization of models of the internal structure of the Earth is currently being conducted (Pushcharovsky and Pushcharovsky 2011, Dobretsov and Shatskiy 2012, Litasov and Schatskiy 2016). It is

considered that it will be able to refine the existing results on the constitution of the core, to understand the nature of magnetic and electric fields, gravitational characteristics, the value of the heat flux, the geodynamics of the Earth, etc. in such a way. Advances in the field of seismic tomography allow making some additional corrections to the quantitative results. The use of observational data on the Earth's self-oscillations (Molodenskii and Molodenskaya 2015) and their comparison with theoretical calculations (Akbarov *et al.* 2016) will allow conducting further corrections of results.

Despite the current shortcomings and discrepancies between the results of the theoretical model concepts and experimental data, there is a general opinion that the inner core in the form of a solid deformable sphere consists of iron (Fe) and its alloys. This conclusion is based on a comprehensive analysis of the equation of state for Fe compounds, seismology data and thermodynamic modeling. Birch diagrams describing the relationship between the density and velocity of acoustic waves for iron and its compounds are used as the basic (primary) information. A great number of experimental studies had been implemented in this field (Mao *et al.* 2012, Ohtani *et al.* 2013, Chen *et al.* 2014, Decremps *et al.* 2014, Li and Fei 2014, Antonangeli and Ohtani 2015, Prescher *et al.* 2015) since F. Birch's studies (Birch 1952). The recent results have been analyzed in detail in this direction (Litasov and Shatskiy 2016). The existing inconsistencies between various model and experimental results are outlined. The definition of the constitution of iron alloys, the results of which are more or less well justify the seismological data

*Corresponding author, Professor
E-mail: hatamguliyev@gmail.com

plays an important role in these studies.

It is assumed that the outer liquid core has a uniform structure and lack of density relative to Fe (about 10%), and the inner solid core has a nonuniform structure (see Fig. 1(b)) with high anisotropy of seismic waves and lack of density about 5%. The problem of high uncertainty doesn't have a unique solution in the estimation of values of shear velocities in the inner core which are significantly lower than that of iron and its alloys (Litasov and Schatskiy 2016).

It is noted that there are large zones of low velocities which are periodically activated in geological history and can change the geographical positions without going into the discussion of problems related to the nature and formation of mechanisms (see Fig. 1(b)).

The data on distribution of pressure, density, elastic parameters and equations of state are listed in theoretical models of the structure and composition of the medium of the Earth's core. They are coordinated with integral conditions concerning the mass and moment of inertia, the results of studies on the natural oscillations, nutation of the Earth and seismotomographic studies (Bullen 1978, Dziewonski and Anderson 1981, Molodenskiy 2001, Molodenskii 2010, Molodenskii and Molodenskaya 2015, Molodenskii and Molodenskii 2015, etc.).

The discussed problems are also directly related to the mechanics of continuous medium. Insufficient attention is paid on issues related to geomechanics (with the exception of some results of experimental studies) in the review (Litasov and Shatskiy 2016). Apparently, it is related with the limited scope of this paper. These problems had always been in the field of view of researchers (Bullen 1978, Anderson 1995, Sorokhtin and Ushakov 2002, Lobkovski *et al.* 2004, Anderson 2007, Zharkov 2012).

Physical parameters of deformable solid media - such as the elasticity moduli, Poisson's ratio, the velocity of propagation of body elastic waves in mechanics are determined under specific conditions (Lyav 1935, Sedov 1970). It is required to comply with the conditions of smallness of uniformly distributed homogeneous deformation $\varepsilon \ll 1$ and the smallness of the ratio $\frac{P}{\mu}$ (where P is a parameter of loading, in particular, pressure; μ are moduli of the medium shift; ε is deformation parameter) in classical linear theory of elasticity of isotropic homogeneous media within the framework of which the indicated parameters are interpreted in all theoretical models of the Earth. The condition of uniform distribution of homogeneous deformation should also be controlled in the process of deformation of specific structures (sphere in the considered case). First of all, it is necessary to achieve simultaneous fulfillment of commonly accepted requirements of the mechanics for the media and constructions in solving the problems on distribution of physical and mechanical properties in the Earth's interior, in particular in the solid core. Specific data (see Fig. 1(b)) on violating the requirements of the mechanics are suggested for pressure $P=329$ GPa and shear modulus $\mu=157$ GPa at a level of the sphere surface shown in publications (Bullen 1978, Dziewonski and Anderson 1981, Anderson 1995, Anderson 2007, Litasov and Shatskiy 2016). It can be seen that the value P exceeds the value μ more than 2 times.

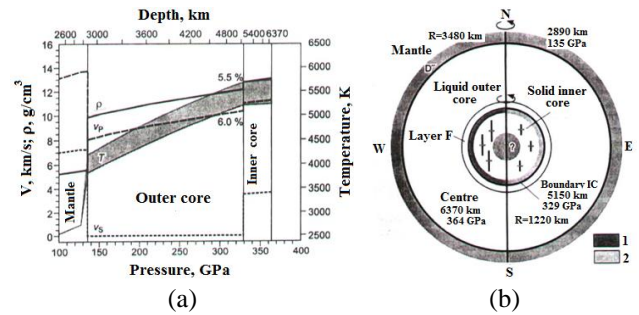


Fig. 1 α -profiles of the density distribution, velocities of sonic waves in the Earth's core on model PREM (Dziewonski and Anderson 1981) and also the temperature (Nimmo 2015) (The numbers show the change in density and V_P at the boundary of the inner core in %). b -scheme of structure of the Earth's core reflecting the main results of the seismological researches (F-layer with the reduced velocities V_P , isotropic structure of the upper layer of the inner core with the differences in the hemispheres, the presence of an additional inner core (in question) are shown. The amplitude of the anisotropy of seismic waves is indicated by icons in the polar and equatorial directions according to the data of papers (Deuss 2014, Souriau and Calvet 2015) with changes. 1-low velocity, light damping; 2-high velocity, heavy damping). (Fig. 1(a) and 1(b) taken from Litasov and Shatskiy 2016)

According to Avsyuk (1973, 2001), Adushkin *et al.* (2000), Levin (2001) the sphere of solid core takes part in movements within the liquid outer core due to the rotational motion of the Earth and tidal influences. Pressure value can nonuniformly be increased even more due to the resistance to this movement.

The conditions of carrying out the requirements concerning uniform distribution of homogeneous deformation are observed in standard laboratory experimental studies of physical and mechanical properties. Methods for conducting experiments, smallness of geometric dimensions of model samples, the actual impossibility of considering the mechanisms of long-term (over geological time) deformation and a number of other reasons don't allow providing possible violations of conditions of the mechanics under conditions of natural occurrence, as well as to exclude from the results of interpretations of influence of uncontrolled perturbations related to the mechanisms of long-term deformability of the structure of the sphere under the conditions of huge value of compression.

2. Problem statement

This paper presents the results of geomechanical analysis of the data of geophysical studies within the non-classical linearized approach (NLA) (Abasov *et al.* 2000, Guliyev 2010). At the same time the numerical data PREM (Dziewonski and Anderson 1981) are used taking into account the fact that the parameters of the inner core provided in this work taken as a basis in all pre-proposed

theoretical models of the medium (Bullen 1978, Kennett and Engdahl 1991, Morelli and Dziewonski 1993, Kennett *et al.* 1995, Anderson 2007, Pushcharovsky and Pushcharovsky 2011). There are only minor differences which have not significant meaning for the conducted geomechanical analysis in various models.

The purpose of geomechanical analysis is to determine the conditions for pressure and strain ensure the correctness of the calculations of physical and mechanical properties of the model of solid core of the Earth on the basis of complex of geophysical data. The pressure and strain values should satisfy certain conditions in determining the physical and mechanical parameters of the medium. Only the results of measurements and calculations obtained in compliance with the conditions of uniform distribution of homogeneous strain is considered reliable. This condition may be violated in different situations.

3. Achievements of theoretical limit of strength

Let's consider the case when the medium is evenly and uniformly deformed prior to the beginning of fracture. In this case, all calculations on the physical and mechanical parameters are correct, if the pressure value does not exceed the theoretical limit of strength. It is shown in NLA (Kuliev 1988a) that the value of the theoretical limit of the strength of the medium is defined as $P=\mu$ under the conditions of compression (we are interested in this variant of deformation) for a perfect elastic isotropic material. Theoretically, it is the maximum (limit) pressure until the achievement of which the medium is deformed evenly and uniformly without fracture. It is determined from the condition of the loss of the ellipticity of motion Eq. (2). In this case, the conditions $\mu > 0; \lambda + \frac{2}{3}\mu > 0$ of classical linear theory of elasticity (here λ, μ are Lamé's elasticity moduli) are preserved. The ultimate strength value is even lower on classical theories of strength (Rabotnov 1988), which dramatizes the situation even more. Naturally, proof strength is significantly less than ultimate strength.

4. Instability of equilibrium state

The uniform distribution of strain in the medium may also be violated as a result of the instability (in various forms), without fracture.

NLA allows defining the limits of change of strain within the framework of which the equilibrium of uniformly deformed states is stable. In case of violation of the stability conditions, the change of the equilibrium state of initially homogeneous uniform strain occurs. As a result, the strain in the body is unevenly distributed before reaching the limit strength of the material.

The questions of density distribution of the medium depending on the change of the strain were studied (Guliyev and Askerov 2007, Guliyev 2010, 2011, 2013). It is shown that, this dependence is not continuous due to the instability of strain under compression. Therefore, the change of the medium density in the deformable body is not monotone,

but spasmodic in certain situations.

Let's consider the problem of stability of solid sphere to concretize the discussion. It is necessary to determine the highest values of surface compressive loads in which the equilibrium state of solid sphere remains stable. Previous theoretical studies (Guz 1979) shows that this load is determined by solving the problem of axisymmetric form of buckling of isotropic homogeneous sphere. Let's assume that the sphere is filled with homogeneous isotropic medium within the continuum approximation. The external compressive load is given on the surface of the sphere.

The questions of stability of equilibrium state of isotropic sphere under the influence of uniform surface loadings were studied in detail (Guz 1979, 1986a). Studies were carried out within the framework of a three-dimensional non-classical linearized theory (NLA), sources of which date back to the incremental theory of mechanics of deformable solid body (Biot 1965). At the present time, three-dimensional NLA is developed greatly and is used to study various problems of mechanics (Guz 1979, 1986a, b, 1989, Kuliev 1988b, Akbarov 2013, 2015).

The two states of deformable body are considered in NLA. The first state (motion, equilibrium, strain process) is primary or nonperturbed. The second condition is perturbed. All values relating to the second condition are presented as the sum of the corresponding values of the first and second state. Perturbations are considered to be small values compared to the corresponding values of the first (nonperturbed) state. Natural (undeformed) state, which corresponds to the case of lack of pressure and strain in the body is also used to describe the strain in the Lagrangian method.

Deformation is taken in the following form under the uniform initial state

$$u_m^0 = (\lambda_m - 1) X_m \quad (1)$$

Here u_m are displacement components along the coordinate axis; λ_m are coefficients of elongation (shortening) along the coordinate axis; X_m are the Cartesian coordinates.

In homogeneous initial state, equation systems of motions take the form within the compressible medium in the Lagrangian coordinates (which coincide with the Cartesian coordinates in the natural state) (Guz 1986a, b)

$$\left(\omega_{im\alpha\beta} \frac{\partial^2}{\partial x_i \partial x_\beta} + \rho \Omega^2 \delta_{m\alpha} \right) u_\alpha = 0, \quad (2)$$

$$i, \beta, \alpha, m = 1, 2, 3, 4; \quad \omega_{im\alpha\beta} = const$$

Boundary conditions at the surface of the domain S_1 in terms of stress

$$N_i \omega_{ij\alpha\beta} \frac{\partial u_\alpha}{\partial x_\beta} = P_j \quad (3)$$

Here u_α are vector components of disturbance of displacement; P_j is disturbance of surface forces; ρ is the medium density; N_i are components of unit normal vector to the surface of the body in the natural state; $\delta_{m\alpha}$ is the

Kronecker symbol; $\omega_{\alpha\beta}$ are covariant components of the tensor of the fourth rank characterizing linear, non-linear physical-mechanical properties of the medium and its initial state of stress. In considering the problems of the static, inertial component $\rho\Omega^2\delta_{m\alpha}$ is omitted in the Eq. (2) where Ω is cyclic frequency of harmonic wave.

Various classifications are possible in the formulation of problems of NLT. "Follower" (non-conservative) and "dead" (conservative) surface forces are distinguished depending on the nature of the action of surface loads. Surface "follower" forces are those forces which keep up changes of configurations of body surface in the process of deformation, i.e., they can change the direction of an action and value according to deformation process. An action of liquid and gas is modeled as "follower" loads in the calculation practice. Surface "dead" forces retain their original direction and value in the process of deformation. Three various variants of theory are also distinguished in the NLT depending on values of deformation in the initial state (Guz 1986a) a) theory of large (finite) initial strain; b) the first variant of the theory of small initial strain (shifts and elongation are small in comparison to the unit); c) the second variant of the theory of small initial strain (it is considered that the relationship between the components of the strain tensor and the first derivatives from displacements are linear in addition to the first variant of the theory of small initial strain). Two cases are also distinguished to provide plane harmonic wave. The variation of distance isn't considered between material particles due to initial strain, and the velocity of wave propagation is called "natural" in the first variant (Thurston and Brugger 1964, Guz 1986b). The variation of distance isn't considered between material particles due to the initial strain, and the velocity of wave propagation is called "true" in the second variant. The formulations of buckling problem are also distinguished for compressible and non-compressible models in the deformable bodies. The problems are considered only for compressible and non-compressible media and case of "true" velocities in the present paper. The generalization of results is of technical nature for other cases.

In the case of the uniform homogeneous deformation of singly connected isotropic media $\lambda_1=\lambda_2=\lambda_3$ for all the above-mentioned variants of the theory of the initial strain $\omega_{ij\alpha\beta}$ in a single form (Guz 1986a)

$$\omega_{ij\alpha\beta} = \lambda_0 \delta_{ij} \delta_{\alpha\beta} + \mu_0 (\delta_{i\alpha} \delta_{j\beta} + \delta_{i\beta} \delta_{j\alpha}) + S_0 (\delta_{ij} \delta_{\alpha\beta} - \delta_{i\alpha} \delta_{j\beta}) \quad (4)$$

where the designations are respectively introduced for the theory of large initial strain and the first variant of small initial strain theory and the second variant of small initial strain theory

$$\lambda_0 = \lambda_1^2 a_0 - S_0, \quad \mu_0 = \lambda_1^2 b_0 + S_0 \quad (5)$$

$$\lambda_0 = \lambda_1^2 a_0 - S_0, \quad \mu_0 = \lambda_1^2 b_0 + S_0, \quad S_0 = \sigma_0 \quad (6)$$

$$\lambda_0 = a_0 - S_0, \quad \mu_0 = b_0 + S_0, \quad S_0 = \sigma_0 \quad (7)$$

Values a_0, b_0, S_0 and σ_0 in terms of $\lambda_1=\lambda_2=\lambda_3$ are determined from expressions $a_0=A_{\beta i}-2\mu_{ij}$; $b_0=\mu_{ij}$; $S_0=S^0_{\beta\beta}$; $\sigma_0=\sigma^0_{\beta\beta}$.

The summation isn't conducted on indices in these formulae; $\sigma^0_{\beta\beta}$ are normal components of the stress tensor in the initial state.

Explicit algebraic expressions for $A_{\beta i}$, μ_{ij} and $S^0_{\beta\beta}$ are obtained in considering the concrete elastic potentials (Guz 1986a).

Considering Eq. (4), the Eqs. (2) and (3) take the form

$$(\lambda_0 + 2\mu_0) \text{grad div } u - \mu_0 \text{rot rot } u + \rho\Omega^2 u = 0 \quad (8)$$

$$\left[\bar{N}(\lambda_0 + S_0) \text{div } u + (2\mu_0 - S_0) \bar{N} \cdot \nabla u + (\mu_0 + S_0) \bar{N} \times \text{rot } u \right] = \bar{P} \quad (9)$$

In setting "follower" load at the surface the right side of the condition (9) takes the form

$$\bar{P} = S_0 \left(\bar{N} \text{div } u - \bar{N} \cdot \nabla u - \bar{N} \times \text{rot } u \right) \quad (10)$$

Eq. (8) completely coincides with Lamé's equation of classical linear theory of elasticity, if replace Lamé's parameters λ and μ to the parameters λ_0 and μ_0 according to Eqs. (5)-(7).

It follows from Eqs. (9) and (10) that in general such an analogy is absent in the linear theory under the boundary conditions. The analogy holds only in the case of "follower" loads.

Thus, the mathematical problem of stability of an isotropic sphere under uniform compression is formulated in the form of Eq. (8) and the boundary condition of Eq. (9). It is necessary to take $P \equiv 0$ in case of setting the external load on the surface of the sphere in the form of "dead" loads in the right side of the boundary conditions of Eq. (9).

In such formulation, the problem of stability of the equilibrium state of the body of an arbitrary geometrical shape from the compressible media was studied in detail under uniform compression (Guz 1979, 1986a). It is shown that in case of setting "follower" loads on the whole body surface, equilibrium state defined by Eq. (1) is stable under the fulfillment of conditions

$$\lambda_0 + \frac{2}{3} \mu_0 > 0; \quad \mu_0 > 0 \quad (11)$$

Conditions of Eq. (11) should always be fulfilled, and therefore, they are considered as the restriction on the structure of the equation of state. It is considered as specific models of the medium a) elastic isotropic body with potential of harmonic type within the theory of large initial strain and stability conditions are obtained in the form

$$0 < \lambda_1 < 1; \quad \left(\lambda + \frac{2}{3} \mu \right) \left(\lambda + \frac{4}{3} \mu \right)^{-1} < \lambda_1 < 1 \quad (12)$$

b) an elastic body with a quadratic potential within the second variant of small initial strain theory and stability condition is obtained in the form

$$(2 - \lambda_1) \left(\lambda + \frac{2}{3} \mu \right) > 0; \quad \mu + 3(\lambda_1 - 1) \left(\lambda + \frac{2}{3} \mu \right) > 0 \quad (13)$$

c) elasto-plastic body (deformation theory) within the second variant of small initial strain theory and stability condition is obtained in the form

$$P < \mu \quad (14)$$

d) elasto-plastic body (Prandtl-Reuss theory of plasticity) within the second variant of small initial strain theory

$$P < \lambda_1^2 \mu \quad (15)$$

It is shown for all the considered models of the medium that equilibrium state is stable in case of setting follower loads on the surface of an isotropic sphere under the fulfillment of conditions of Eqs. (11)-(15). Herein, the distribution of homogeneous deformation is uniform.

Considering the body in the form of a sphere (medium material is given as: quadratic elastic potential, deformation theory of small elasto-plastic deformation and Prandtl-Reuss theory of plasticity; hereditary-elastic linear body of ageless type; viscous elasto-plastic body), it is shown that in case of "dead" surface loads, there is a critical load P_{cr} (according to the value this load is less than the value μ) in reaching of which the equilibrium state of the sphere defined by Eq. (1) is unstable. As a result, the distribution becomes uniform in the body of homogeneous deformation. Similar results have also been obtained within the theory of large initial strain using various elastic potentials.

In this case, in general terms it is impossible having taken the inequality for λ_0 , μ_0 and S_0 , and so that it is ensured the fulfillment of the condition of Eq. (11) regardless of the body shape. Therefore, the following standard equation (Guz 1979, 1986a) is obtained to define low values of the critical load in the considered problem providing general homogeneous solutions of the Eq. (8) similar to the classical theory of elasticity and requiring the fulfillment of the boundary conditions of Eq. (9) (it is necessary to take $P \equiv 0$ in the right side)

$$2\mu_0(\lambda_0 + \mu_0) + S_0(\lambda_0 + 3\mu_0) = 0 \quad (16)$$

Critical forces or strain leading to the buckling of the equilibrium state of the sphere are calculated using Eqs. (5)-(7) from Eq. (16).

We obtain within the second variant of small initial strain theory for elastic isotropic body from Eq. (16) considering Eq. (7)

$$P_{cr} = \frac{\mu}{4(1-2\nu)} \left(5 - 4\nu - (16\nu^2 - 8\nu + 9)^{\frac{1}{2}} \right) \quad (17)$$

where ν is Poisson's coefficient of the medium.

In case of large initial strain theory and application of harmonic elastic potential using Eq. (5) from the Eq. (16) we define the critical value of shortening as follows

$$\begin{aligned} (\lambda_1)_* &= 1 + \frac{-5 + \nu(3+2\nu) + \left[[5 - \nu(3+2\nu)]^2 - 4(1-2\nu)[4 - \nu(1+2\nu)] \right]^{\frac{1}{2}}}{8 - 2\nu(1+2\nu)} \\ &= \frac{(3-2\nu)(1+\nu)}{(3-2\nu)(1+\nu) + (1-2\nu)} \end{aligned} \quad (18)$$

Similarly, we can obtain the calculation formulae for the case of quadratic, Murnaghan and other forms of elastic potentials. Eqs. (17) and (18) indicate that the buckling of the equilibrium state is implemented for both small and large deformations and is general in nature.

4.1 Internal instability

Critical values of stress and strain leading to violation of conditions of Eq. (11) cause the phenomenon in the body, which is called the "internal" instability in theory (Biot 1965, Guz 1986a, b). In the case of initially isotropic media, as if the initial pressure plays the role of an internal structure similar to the internal structure of the composite media in the anisotropic approximation within the phenomenological (continuum) approach.

"Internal" instability is studied for an infinite body in the continuum description of materials when a certain load is given on "infinity". At the same time the instability is not related to the influence of boundary conditions and geometrical dimensions of the body or structural elements. The critical values of the stress and strain are determined from the study of system types of differential Eqs. (2) and (8) in an infinite domain. The system of Eq. (2) loses the property of ellipticity under the conditions of occurrence of the phenomenon of "internal" instability. In this case, the condition of uniqueness of the solution of Eq. (11) of the linearized problems is violated. The limit value of coefficient of elongation (shortening) is determined from (11) λ_1^* by setting the structure of the elastic potential. In case of modeling the deformation process using harmonic elastic potential within the theory of large initial strain from Eqs. (5) and (11), we get

$$\lambda_1^* = \frac{1+\nu}{2-\nu}; \quad \varepsilon_0^* = \frac{3}{2} \frac{2\nu-1}{(2-\nu)^2} \quad (19)$$

We obtain in case of quadratic elastic potential from Eqs. (11) and (12) within large initial strain theory

$$\lambda_1^* = \left(\frac{1+\nu}{2-\nu} \right)^{\frac{1}{2}}; \quad \varepsilon_0^* = \frac{1}{2} \frac{2\nu-1}{2-\nu} \quad (20)$$

We obtain in case of linear elastic isotropic material within the second variant of small initial strain theory

$$P_{cr} = \mu; \quad \varepsilon_0^* = \frac{1}{2} \frac{2\nu-1}{1+\nu} \quad (21)$$

ε_0 is a parameter of uniform deformation in Eqs. (19)-(21). It follows from the above mentioned Eqs. (11)-(15) and Eqs. (19)-(21) that the "internal" instability occurs within the NLA in uniform deformation (compression) of the isotropic sphere on the level of pressure comparable in value with shear moduli for different elastic potentials obtained within the second variant of small and large initial strain theory.

5. Elastic wave propagation in the deformed medium

The implementation of condition of Eq. (11) also

provides validity (not negative values) velocities of propagation of small perturbations (such as the Hadamard conditions (Truesdell 1975, Guz 1986b)) in the form of small-amplitude waves in media with initial deformations.

Consequently, equality to zero or invalidity of velocities of propagation of acoustic waves correspond to the phenomenon of “internal” instability of the stressed media.

Basic kinematic parameters of the wave field-velocities of propagation of elastic waves significantly depend on the pre-deformation. Theoretical and applied problems are intensively studied in this field by Biot (1965), Guz (1986b), Kuliev and Jabbarov (1998, 2000), Akbarov (2015), Hadji *et al.* (2015), Li and Tao (2015), Tao *et al.* (2016), Teachavorasinskun and Pongvithayapanu (2016), Kakar and Kakar (2016). Problems of propagation of elastic waves are also intensively studied in the solid core of the Earth by Deuss (2014), Wang *et al.* (2015). Below provided results were obtained within the framework of non-classical linearized theory considering small and large initial deformations.

In case of uniform pre-compression of isotropic medium, the “true” velocities of propagation of elastic waves in it are defined by the expressions (Guz 1986b)

$$\rho C_l^2 = \lambda + 2\mu - PK_p^R; \quad \rho C_s^2 = \mu - PK_s^R. \quad (22)$$

Here C_l , C_s are the “true” velocities of quasi-pressure and quasi-shear elastic waves; K_p^R , K_s^R are coefficients of nonlinear action of isotropic medium (Sadovsky and Nikoalev 1982, Guliyev 2009). Structures of expressions for K_p^R and K_s^R are concretized by assignment the form of elastic potentials.

It was obtained in the case of application of elastic potential of Murnaghan's form and “true” velocities within the second variant of small initial strain theory (Guliyev 2009)

$$K_p^R = \frac{1}{3K_0} [5\lambda + 6\mu + 2(c + 5b + 3a)]; \quad (23)$$

$$K_s^R = \frac{1}{3K_0} (3\lambda + 4\mu + c + 3b)$$

within the first variant of small and large initial strain theory.

$$K_p^R = \frac{1}{3K_0} [7\lambda + 10\mu + 2(c + 5b + 3a)]; \quad (24)$$

$$K_s^R = \frac{1}{3K_0} [3(\lambda + 2\mu) + c + 3b]$$

Here a , b , c are the elasticity moduli of the 3rd order $K_0 = \lambda + \frac{2}{3}\mu$. If $a=b=c=0$ is accepted in Eqs. (23) and (24), we obtain the results corresponding to quadratic elastic potential within the second variant of small initial strain theory

$$K_p^R = \frac{1}{3K_0} (5\lambda + 6\mu) = \frac{3-\nu}{1+\nu}; \quad (25)$$

$$K_s^R = \frac{1}{3K_0} (3\lambda + 4\mu) = \frac{2-\nu}{1+\nu}$$

within the first variant of small and large initial strain theory

$$K_p^R = \frac{1}{3K_0} (7\lambda + 10\mu) = \frac{5-3\nu}{1+\nu}; \quad (26)$$

$$K_s^R = \frac{1}{K_0} (\lambda + 2\mu) = \frac{3(1-\nu)}{1+\nu}$$

The presence of Eqs. (23)-(26) allows calculating the influence of non-linear strain on the velocity of propagation of elastic waves.

We derive conditions under the implementation of which the velocities of propagation of elastic waves are true in pre uniformly strained isotropic medium using the Eq. (22). Accordingly, pressure elastic wave couldn't be propagated with true velocity in cases of the second variant of small and large initial strain theory in the quadratic elastic potential in terms of implementation

$$\frac{P}{\mu} \geq \frac{2(1-\nu^2)}{(1-2\nu)(3-\nu)}; \quad \frac{P}{\mu} \geq \frac{2(1-\nu^2)}{(1-2\nu)(5-3\nu)}. \quad (27)$$

in the stressed isotropic medium. This condition for shear elastic waves takes the form

$$\frac{P}{\mu} \geq \frac{1+\nu}{2-\nu}; \quad \frac{P}{\mu} \geq \frac{1+\nu}{3(1-\nu)}. \quad (28)$$

It follows from the Eqs. (29) and (24) that it is also necessary to have numerical information on the elasticity moduli of the 3rd order a , b , c along with the data of Lamé's coefficients to obtain the numerical evaluation in the case of using the potential of Murnaghan's form.

6. Conclusions

Based on the results obtained in the previous sections Eqs. (11)-(21) for the theoretical limit of strength and instability of the equilibrium state and Eqs. (22)-(28) for propagation of elastic waves in the deformable media, the appropriate calculations are performed. Numerical values of critical forces and elongations are shown in Table 1 corresponding to the buckling of the equilibrium state in Eq. (1) in setting of “dead” forces and “internal” instability on the surface of the sphere.

The results for $\frac{P}{\mu}$ are calculated on Eq. (17), for $(\lambda_1)_*$ on Eq. (18), and λ_1^* on Eq. (19). They show that the equilibrium state of the sphere is unstable both within the theory of small and large initial strain in the considered type of loading. The critical values of forces and coefficient of elongation (shortening) in obtaining of which “internal” instability is respectively implemented under small and large initial strain in the sphere are shown (lines of 2 and 4 of Table 1). It follows from the comparison of results of the second and fourth lines to the results of the third and fifth lines of Table 1 that the buckling of the equilibrium state of elastic homogeneous

Table 1 Critical force and deformation parameters

ν	0	0.1	0.2	0.3	0.4	0.41	0.45
$\frac{P^*}{\mu}$	1	1	1	1	1	1	1
$\frac{P_*}{\mu}$	0.5	0.53	0.57	0.60	0.64	0.64	0.65
λ_1^*	0.5	0.58	0.67	0.76	0.88	0.89	0.94
$(\lambda_1)_*$	0.75	0.79	0.84	0.89	0.94	0.94	0.97

Table 2 Coefficients of non-linear actions and critical force parameters

ν	0	0.1	0.2	0.3	0.4	0.41	0.45
K_P^R	-1.5	-1.3182	-1.1668	-1.0385	-0.9286	-0.9184	-0.8793
	-2.5	-2.1364	-1.8333	-1.5769	-1.3571	-1.3369	-1.2586
K_S^R	-1	-0.8636	-0.75	-0.6538	-0.5714	-0.5638	-0.5345
	-1.5	-1.2273	-1	-0.8077	-0.6429	-0.6277	-0.569
$\frac{P_l}{\mu}$	0.6667	0.8534	1.1429	1.6852	3.2308	3.5689	6.2549
	0.4	0.5266	0.7273	1.1098	2.2105	2.4518	4.3699
$\frac{P_s}{\mu}$	0.5	0.5789	0.6667	0.7647	0.875	0.8868	0.9355
	0.3333	0.4074	0.5	0.6190	0.7778	0.7966	0.8788

isotropic sphere on a geometric forming in case of influence of “dead” loads on its surface precedes the “internal” instability. The equilibrium state of the sphere is stable on geometric forming in case of influence of “follower” loads on the surface. Therefore, the “internal” instability occurs without preliminary forming in this case. It should be emphasized that it is clear from the formulae of critical forces and elongation that they don't depend on the geometric parameters of the sphere and buckling mode. An exhaustive explanation is given to this case (Guz 1986a). The boundary surface is one of the coordinate surfaces of the spherical system of coordinates in the considered problems. Eigen-values should not depend on the geometric parameters of the problem due to the nature of Lamé's Eq. (8) (which includes derivatives of the same order) and the indicated case. The critical loads will depend on the geometric parameters (for example, thin-walled parameters) in case of considering the problems of stability of bodies bounded by several coordinate surfaces. The lack of effects of plastic and viscous properties of the material (Eqs. (14) and (15)) on the value of the critical parameters is related with the fact that inelastic deformation is incompressible due to the adopted laws of state, and inelastic deformation does not occur due to uniform compression in the initial state.

Calculation results implemented on Eqs. (25)-(28) are shown in Table 2. The data relating to the second variant of small initial strain theory is given in the numerator but in denominations - large initial strain theory.

The numbers given in lines 4 and 5 of the Table 2 show that if these values are exceeded, the conditions of Eqs. (27) and (28) aren't fulfilled within the considered variants of NLT, i.e., elastic pressure and shear waves can't be propagated in the medium with true velocity accordingly. The subscript in $P l$ -

indicates that these values relate to pressure and S to shear waves. Contrary to that it follows from the data of Fig. 1(a), (b) that velocities of pressure and shear elastic waves in the sphere are true in PREM in conditions $P \geq 2\mu$. It shows once again that the data on the physical and mechanical, acoustic and density characteristics in the theoretical models should be distributed in accordance with relevant requirements of the mechanics of deformable media with initial stress considering nonlinear laws of state. The obtained results relate to the data of the inner core. At the same time, they predict that it is necessary to process and interpret the relevant geological and geophysical data on the basis of non-linear (at least within NLT) theories considering preliminary deformation of the medium in solving the problem on the distribution of mantle and lithosphere parameters.

Data on the composition of the inner core material indicate its anisotropy (Fig. 1(b)) (Litasov and Shatskiy 2016). Naturally, phenomenon of “internal” instability will occur at much lower levels of loads and strain than in the isotropic approximations in the anisotropic medium because of the smallness of the shear stiffness.

It should be noted that the results presented in this article are obtained without considering the influence of temperature, the distribution of which is shown in Fig. 1(a). The consideration of temperature influence on critical values of instability worsens the situation. Buckling process is implemented at significantly lower pressure level under the influence of temperature fields. Therefore, the consideration of temperature will not provide a qualitative impact on the conclusion on the insufficiency of interpretation of geophysical data within the classical theory. The consideration of temperature is necessary to solve specific problems of the local distribution of the considered parameters.

Acknowledgments

The research described in this paper was financially supported by the scientific-research program of ANAS on a subject “Complex of theoretical and experimental studies of interdisciplinary problems of geomechanics” approved by the decision of the Presidium of the ANAS № 5/3 dated on February 11, 2015 (2015 - 2017).

References

- Abasov, M.T., Kuliev, G.G. and Dzhevanshir, R.D. (2000), “Development model of the lithosphere”, *Doclady Rus. Acad. Sci.*, **70**(2), 129-135.
- Adushkin, V.V., An, V.A., Kvazik, P.B. and Ovchinnikov, V.M. (2000), “The rotation of the inner core from seismic records of nuclear explosions”, *Thesis of reports “The Inner Core of the Earth. Geophysical Data on Process in the Core”*, IPE RAS, Moscow, Russia.
- Akbarov, S.D. (2013), *Stability Loss and Buckling Delamination: Three-Dimensional Linearized Approach for Elastic and Viscoelastic Composites*, Springer, Berlin, Germany.
- Akbarov, S.D. (2015), *Dynamics of Pre-Strained Bi-Material Elastic Systems: Linearized Three-Dimensional Approach*, Springer, Switzerland.
- Akbarov, S.D., Guliyev, H.H. and Yahnioglu N. (2016), “Natural vibration of the three-layered solid sphere with middle layer

- made of FGM: Three-dimensional approach”, *Struct. Eng. Mech.*, **57**(2), 239-263.
- Anderson, D. (2007), *New Theory of the Earth*, Cambridge University Press, New York, U.S.A.
- Anderson, O.L. (1995), *Equations of State of Solids for Geophysics and Ceramic Science*, Oxford University Press, New York, U.S.A.
- Antonangeli, D. and Ohtani, E. (2015), “Sound velocity of hcp-Fe at high pressure: Experimental constraints, extrapolations and comparison with seismic models”, *Prog. Earth Planet. Sci.*, **2**(3), 1-11.
- Avsyuk, Y.N. (1973), “Motion of the inner core”, *Proc. USSR Acad. Sci.*, **212**(5), 1103-1105.
- Avsyuk, Y.N. (2001), *Extraterrestrial Factors Affecting Tectogenesis, in Fundamental Problems of Global Tectonics*, Scientific World, Moscow, Russia.
- Badro, J., Côté, A.S. and Brodholt, J.P. (2014), “A seismologically consistent compositional model of Earth’s core”, *Proc. Natl. Acad. Sci. USA*, **111**(21), 7542-7545.
- Biot, M.A. (1965), *Mechanics of Incremental Deformation*, Wiley, New York, U.S.A.
- Birch, F. (1952), “Elasticity and constitution of the Earth’s interior”, *J. Geophys. Res.*, **57**(2), 227-286.
- Bullen, K.E. (1978), *The Density of the Earth*, Mir, Moscow, Russia.
- Chen, B., Li Z., Zhang, D., Liu, J., Hu, M.Y., Zhao, J., Bi, W., Alp, E.E., Xiao, Y., Chow, P. and Li, J. (2014), “Hidden carbon in Earth’s inner core revealed by shear softening in dense Fe₇C₃”, *Proc. Natl. Acad. Sci. USA*, **111**(50), 17755-17758.
- Decremps, F., Antonangeli, D., Gauthier, M., Ayrinhac, S., Morand, M., Marchand, G.L., Bergame, F. and Phillippe, J. (2014), “Sound velocity of iron up to 152 GPa by picosecond in diamond anvil cell”, *Geophys. Res. Lett.*, **41**(5), 1459-1464.
- Deuss, A. (2014), “Heterogeneity and anisotropy of earth’s inner core”, *Ann. Rev. Earth Planet. Sci.*, **42**, 103-126.
- Dobretsov, N.L. and Shatskiy, A.F. (2012), “Deep carbon cycle and geodynamics: The role of the core and carbonatite melts in the lower mantle”, *Russ. Geol. Geophys.*, **53**(11), 1117-1132.
- Dziewonski, A.M. and Anderson, D.L. (1981), “Preliminary reference earth model”, *Phys. Earth Planet. In.*, **25**(4), 297-356.
- Guliyev, H.H. (2009), “Nonlinear actions of elastic medium and their effect on the propagation velocity of elastic waves”, *Proc. NAS Azerbaijan Earth Sci.*, (2), 31-39.
- Guliyev, H.H. (2010), “A new theoretical conception concerning the tectonic processes of the Earth”, *New Concept. Global Tectonics Newslett.*, (56), 50-74.
- Guliyev, H.H. (2011), “Fundamental role of deformations in internal dynamics of the Earth”, *New Concept. Global Tectonics Newslett.*, (61), 33-50.
- Guliyev, H.H. (2013), “Deformations, corresponding to processes of consolidation, deconsolidation and phase transitions in internal structures of the Earth”, *Geophys. J.*, **35**(3), 166-176.
- Guliyev, H.H. and Askerov, A.D. (2007), “The solution of nonlinear problem on increase of environment density of the Earth depths and its instability”, *Proc. NAS Azerbaijan Earth Sci.*, (1), 38-50.
- Guz, A.N. (1979), *Stability of Elastic Bodies Under Uniform Compression*, Naukova Dumka, Kyiv, Ukraine.
- Guz, A.N. (1986a), *Fundamentals of Three-Dimensional Theory of Stability of Deformable Bodies*, Vishcha shkola, Head Publishing House, Kyiv, Ukraine.
- Guz, A.N. (1986b), *Elastic Waves in Bodies with Initial Stresses, Propagation Patterns*, Naukova Dumka, Kyiv, Ukraine.
- Guz, A.N. (1989), *Fracture Mechanics of Composite Materials under Compression*, Naukova Dumka, Kyiv, Ukraine.
- Hadji L., Hassaine Daouadji, T. and Adda Bedia, E.A. (2015), “A refined exponential shear deformation theory for free vibration of FGM beam with porosities”, *Geomech. Eng.*, **9**(3), 361-372.
- Helffrich, G. and Kaneshima, S. (2010), “Outer-core compositional stratification from observed core wave speed profiles”, *Nature*, **468**(7325), 807-810.
- Hirose, K., Labrosse, S. and Hernlund, J. (2013), “Composition and state of the core”, *Ann. Rev. Earth Planet. Sci.*, **41**, 657-691.
- Kakar, R. and Kakar, Sh. (2016), “Rayleigh wave in an anisotropic heterogeneous crustal layer lying over a gravitational sandy substratum”, *Geomech. Eng.*, **10**(2), 137-154.
- Kennett, B.L.N. and Engdahl, E.R. (1991), “Traveltimes for global earthquake location and phase identification”, *Geophys. J.*, **105**(2), 429-465.
- Kennett, B.L.N., Engdahl, E.R. and Buland, R. (1995), “Constraints on seismic velocities in the Earth from traveltimes”, *Geophys. J.*, **122**(1), 108-124.
- Kuliev, G.G. (1988a), “A new approach to calculation of the theoretical ultimate strength of materials”, *Strength Mater.*, **20**(5), 623-629.
- Kuliev, G.G. (1988b), *Fundamentals of the Mathematical Theory of the Stability of Wells*, Elm, Baku, Azerbaijan.
- Kuliev, G.G. and Jabbarov, M.J. (1998), “To elastic waves propagation in strained nonlinear anisotropic media”, *Proc. NAS Azerbaijan Earth Sci.*, (2), 103-112.
- Kuliev, G.G. and Jabbarov, M.J. (2000), “Amplitude characteristics of elastic waves in stressed medium”, *Doclady Russ. Acad. Sci.*, **370**(4), 672-674.
- Kuskov, O.L. and Khitarov, N.I. (1982), *Thermodynamics and Geochemistry of the Core and Mantle of the Earth*, Nauka, Moscow, Russia.
- Levin, B.V. (2001), *The Role of the Earth’s Inner Core Movements in the Tectonic Processes*, in *Fundamental Problems of Global Tectonics*, Scientific World, Moscow, Russia.
- Li, J. and Fei, Y. (2014), *Experimental Constraints on Core Composition*, in *Treatise on Geochemistry*, Elsevier, Oxford.
- Li, X. and Tao, M. (2015), “The influence of initial stress on wave propagation and dynamic elastic coefficients”, *Geomech. Eng.*, **8**(3), 377-390.
- Litasov, K.D. and Shatskiy, A.F. (2016), “Composition of the Earth’s core: A review”, *Russ. Geol. Geophys.*, **57**(1), 22-46.
- Lobkovski, L.I., Nikishin, A.M. and Hain, V.E. (2004), *Modern Problems of Geotectonics and Geodynamics*, Scientific World, Moscow, Russia.
- Lyav, A.I. (1935), *The Mathematical Theory of Elasticity*, ONTI, Moscow, Russia.
- Mao, Z., Lin, J.F., Liu, J., Alatas, A., Gao, L., Zhao, J. and Mao, H.K. (2012), “Sound velocities of Fe and Fe-Si alloy in the Earth’s core”, *Proc. Natl. Acad. Sci. USA*, **109**(26), 10239-10244.
- Molodenskii, S.M. (2010), “Correctives to the scheme of the Earth’s structure inferred from new data on nutation, tides, and free oscillations”, *Izvestiya Phys. Solid Earth*, **46**(7), 555-579.
- Molodenskii, S.M. and Molodenskaya, M.S. (2015), “Attenuation of free spheroidal oscillations of the Earth after the M=9 earthquake in Sumatra and the super-deep earthquake in the Sea of Okhotsk: I. The admissible Q-factor range for the fundamental mode and overtones of the free spheroidal oscillations”, *Izvestiya Phys. Solid Earth*, **51**(6), 821-839.
- Molodenskii, S.M. and Molodenskii, M.S. (2015), “Attenuation of free spheroidal oscillations of the Earth after the M=9 earthquake in Sumatra and super-deep earthquake in the Sea of Okhotsk: II. Interpretation of the observed Q-factor”, *Izvestiya Phys. Solid Earth*, **51**(6), 840-856.
- Molodensky, M.S. (2001), *The Gravitational Field. The Figure and the Internal Structure of the Earth*, Nauka, Moscow, Russia.
- Morelli, A. and Dziewonski, A.M. (1993), “Body-wave traveltimes and a spherically symmetric P- and S-wave velocity model”, *Geophys. J.*, **112**(2), 178-194.

- Nimmo, F. (2015), *Energetics of the Core*, in *Treatise on Geophysics*, Elsevier, Oxford.
- Ohtani, E., Shibazaki, Y., Sakai, T., Mibe, K., Fukui, H., Kamada, S., Sakamaki, T., Seto, Y., Tsutsui, S. and Baron, A.Q. (2013), "Sound velocity of hexagonal close-packed iron up to core pressures", *Geophys. Res. Lett.*, **40**(19), 5089-5094.
- Prescher, C., Dubrovinsky, L., Bykova, E., Kuppenko, I., Glazyrin, K., Kantor, A., VcCammon, C., Mookherjee, M., Nakajima, Y. and Miyajima, N. (2015), "High poisson's ratio of Earth's inner core explained by carbon alloying", *Nat. Geosci.*, **8**(3), 220-223.
- Pushcharovsky, Y.M. and Pushcharovsky, D.Y. (2011), "When, how and why were the Earth's geospheres formed", *Priroda*, (5), 25-31.
- Rabotnov, Y.N. (1988), *Mechanics of Deformable Solids*, Nauka, Moscow, Russia.
- Sadovsky, M.A. and Nikolaev, A.V. (1982), "New methods of seismic exploration. Prospects of development", *Bull. Acad. Sci. USSR*, **52**(1), 57-64.
- Sedov, L.I. (1970), *Mechanics of the Continuum Medium*, Nauka, Moscow, Russia.
- Sorokhtin, O.G. and Ushakov, S.A. (2002), *Earth Development*, MGU, Moscow, Russia.
- Souriau, A. and Calvet, M. (2015), *Deep Earth Structure: The Earth's Cores*, in *Treatise on Geophysics*, Elsevier, Oxford.
- Tao, M., Chen, Z., Li, X., Zhao, H. and Yin, T. (2016), "Theoretical and numerical analysis of the influence of initial stress gradient on wave propagations", *Geomech. Eng.*, **10**(3), 285-296.
- Teachavorasinskun, S. and Pongvithayapanu, P. (2016), "Shear wave velocity of sands subject to large strain triaxial loading", *Geomech. Eng.*, **11**(5), 713-723.
- Thurston, R. and Brugger, K. (1964), "Third-order elastic constants and velocity of small amplitude elastic waves in homogeneously stressed media", *Phys. Rev.*, **133**(6A), 1604-1610.
- Truesdell, K. (1975), *Initial Course of Rational Mechanics of Continuum Media*, Nauka, Moscow, Russia.
- Wang, T., Song, X. and Xia, H.H. (2015), "Equatorial anisotropy in the inner part of Earth's inner core from autocorrelation of earthquake coda", *Nat. Geosci.*, **8**(3), 224-227.
- Zharkov, V.N. (2012), *Physics of the Earth's Interior*, Nauka i obrazovanie, Moscow, Russia.